


CAT. No.

70150-A

EUROPEAN "SCHUKO" CEE 7/7, DIN 49441, COMPACT DESIGN STRAIGHT PLUG, RUBBER, (IP44 SPLASHPROOF), BLACK, 2 POLE 3 WIRE, 16A-250V, (EU1-16P). APPROVALS= VDE, KEMA, NEMKO, SEMKO, GOST(RUSSIA), RoHS.

APPROVALS	KEMA <input checked="" type="checkbox"/>	NEMKO <input checked="" type="checkbox"/>	SEMKO <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>	GOST <input checked="" type="checkbox"/>
STANDARDS	CEE 7/7 <input checked="" type="checkbox"/>	DIN 49441 <input checked="" type="checkbox"/>			
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>				




16 AMPERE 250 VOLT EUROPEAN "SCHUKO" Receptacle and plug. Non-Polarized. 4.8 mm pins. Receptacle CEE 7. Plug CEE 7-7.

NOTE:

- "SCHUKO" PLUGS AND RECEPTACLES ARE NON-POLARIZED.
- EQUIPMENT GROUND TERMINAL IS IDENTIFIED WITH \perp SYMBOL.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

<u>CORDAGE PREPARATION</u>			
<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN/YELLOW	GROUND	20	6
BLUE	NEUTRAL	20	6
BROWN	LINE	20	6

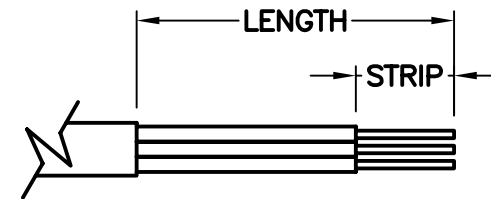

CORDAGE PREPARATION

ALL DIMENSIONS ARE IN MILLIMETERS

