

CAT. No.
70161-A

EUROPEAN "SCHUKO" CONNECTOR BODY, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE,
16 AMPERE 250 VOLT, CONFIGURATION: EU1-16R
STANDARD: CEE-7

APPROVALS / CERT'S. KEMA NEMKO OVE SEMKO VDE


ALL DIMENSIONS ARE IN MILLIMETERS

- NOTE:
1. "SCHUKO" PLUGS AND RECEPTACLES ARE NON-POLARIZED.
2. EQUIPMENT GROUND TERMINAL IS IDENTIFIED WITH \perp SYMBOL.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 11 DIA (0.433")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	15	6
BLUE	NEUTRAL	22	6
BROWN	LINE	22	6

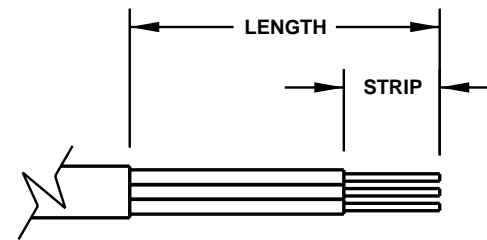

CORDAGE PREPARATION

