

CAT. No.  
**70161**

EUROPEAN "SCHUKO" CONNECTOR BODY, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE,  
16 AMPERE 250 VOLT, CONFIGURATION: EU1-16R  
STANDARD: CEE-7

APPROVALS / CERT'S.

VDE

ALL DIMENSIONS ARE IN MILLIMETERS


NOTE:

1. "SCHUKO" PLUGS AND RECEPTACLES ARE NON-POLARIZED.
2. EQUIPMENT GROUND TERMINAL IS IDENTIFIED WITH  $\perp$  SYMBOL.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.315")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	20	6
BLUE	NEUTRAL	20	6
BROWN	LINE	20	6

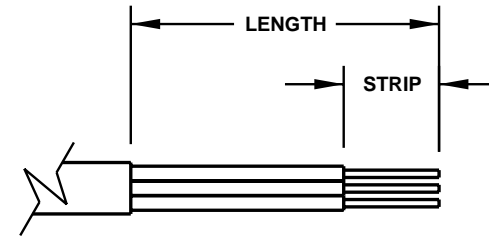

**CORDAGE PREPARATION**

