

CAT. No.

70400-AR

IN-LINE RCD (GFCI) AUTOMATIC RESET, WEATHERPROOF (IP55) CONNECTOR, BLACK, 2P-3W,
 16A-220-240V, 50 Hz, 30 mA TRIP. TEST/RESET BUTTONS. ACCEPTS 7-10mm O.D. SZIE CORDAGE.
 APPROVALS / CERTIFICATIONS = TUV, CE MARK, RoHS CERTIFICATION.

APPROVALS

TUV

CERTIFICATIONS

ROHS

CE MARK

GS


ALL DIMENSIONS ARE IN MILLIMETERS

NOTE: THIS RCD (GFCI) WILL AUTOMATICALLY "RESET" AFTER POWER FAILURE.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 1.5 mm² (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	30	6
BLUE	NEUTRAL	30	6
BROWN	LINE	30	

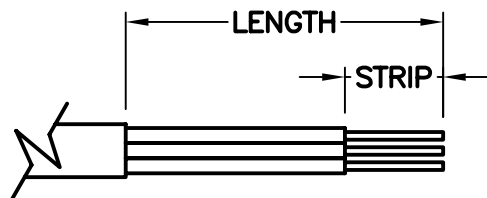

CORDAGE PREPARATION

