

CAT. No.

70400

IN-LINE RCD (GFCI) WEATHERPROOF IP56 CONNECTOR, BLACK, 2 POLE 3 WIRE, 16 AMPERE 230 VOLT, 50 Hz, (3680 WATTS), 30 mA TRIP LEVEL, TEST/RESET BUTTONS. RoHS COMPLIANT. OPERATING TEMPERATURE= -25°C TO +40°C.

APPROVALS	KEMA <input checked="" type="checkbox"/>	TUV <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>	CE MARK <input checked="" type="checkbox"/>


ALL DIMENSIONS ARE IN MILLIMETERS

NOTE: THIS RCD (GFCI) REQUIRES "RESET" AFTER POWER FAILURE.  
NOT RECOMMENDED FOR USE ON FREEZERS, REFRIGERATORS, LIFE SUPPORT EQUIPMENT, ETC.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	13	6
BLUE	NEUTRAL	18	6
BROWN	LINE	18	6

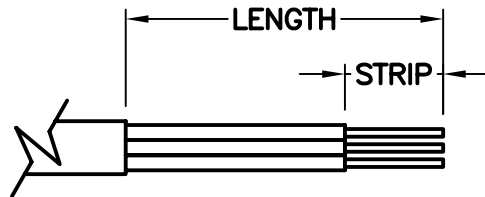

CORDAGE PREPARATION

