

CAT. No.

72140-RCD

UNITED KINGDOM RCD (GFCI) ANGLE PLUG (ACTIVE, NON-LATCHING, REQUIRES MANUAL RESET AFTER POWER FAILURE), IP44, (UK1-13P), 13A FUSE, 2P-3W, 13A-230/250V, 50HZ, 3120 WATTS, 30 mA TRIP LEVEL, TEST/RESET BUTTON, POWER ON/OFF INDICATOR. TEMP. RANGE +40C -25C. CE MARK. BLACK.


CERTIFICATIONS

CE ROHS

STANDARDS

BS 7071 BS 1363

ALL DIMENSIONS ARE IN MILLIMETERS

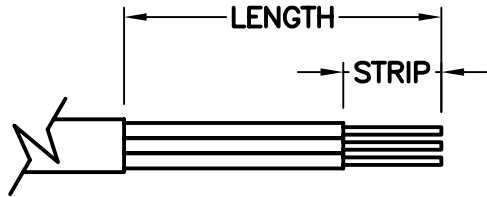

CORDAGE PREPARATION

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	15	6
BLUE	NEUTRAL	22	6
BROWN	LINE	22	6

