

CAT. No.  
**73530**

**SOUTH AFRICA ANGLE PLUG, CLEAR, 2 POLE 3 WIRE, 16 AMPERE 250 VOLT, (UK2-15P).**

STANDARD:SABS 164

APPROVALS / CERT'S.


SABS

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 11 DIA (0.433")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 11 DIA (0.433")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	45	8
BLUE	NEUTRAL	45	8
BROWN	LINE	45	8

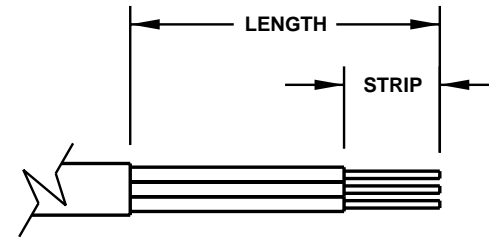

CORDAGE PREPARATION

