

CAT. No.
74140-BLK

AUSTRALIAN PLUG (INSULATED LINE/NEUTRAL BLADES), STRAIGHT CORD GRIP, BLACK,
 2 POLE 3 WIRE, 10 AMP 250 VOLT, (AU 1-10P)
 STANDARD: AS/NZS 3112


APPROVALS: DEPARTMENT OF FAIR TRADING

ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	40	6
BLUE	NEUTRAL	40	6
BROWN	LINE	40	6

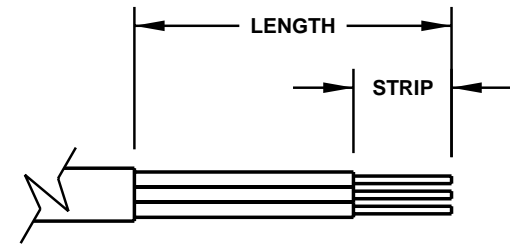

CORDAGE PREPARATION

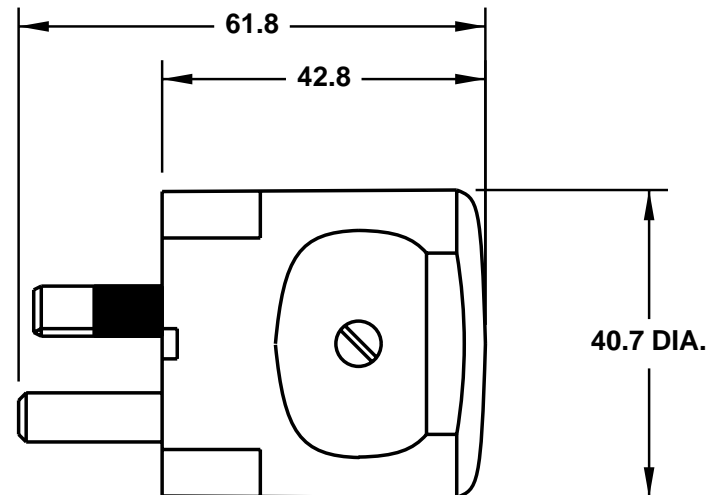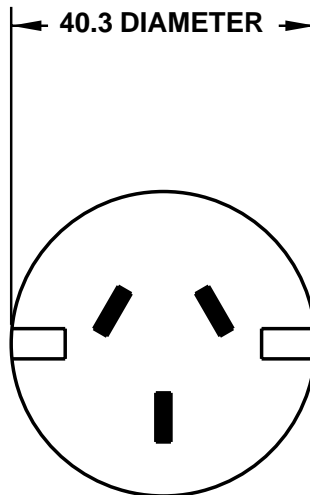

www.InternationalConfig.com
 sales@internationalconfig.com