

CAT. No.
74140

AUSTRALIAN PLUG (INSULATED LINE/NEUTRAL BLADES), STRAIGHT CORD GRIP, WHITE, 2 POLE 3 WIRE,
10 AMPERE 250 VOLT, (AU 1-10P)
STANDARD: AS/NZS 3112


APPROVALS: DEPARTMENT OF FAIR TRADING

ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	40	6
BLUE	NEUTRAL	40	6
BROWN	LINE	40	6

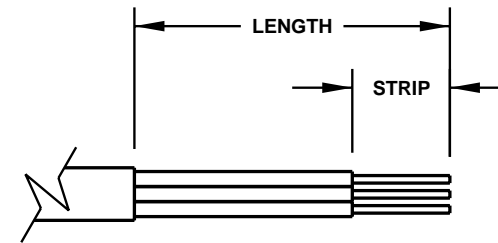

CORDAGE PREPARATION

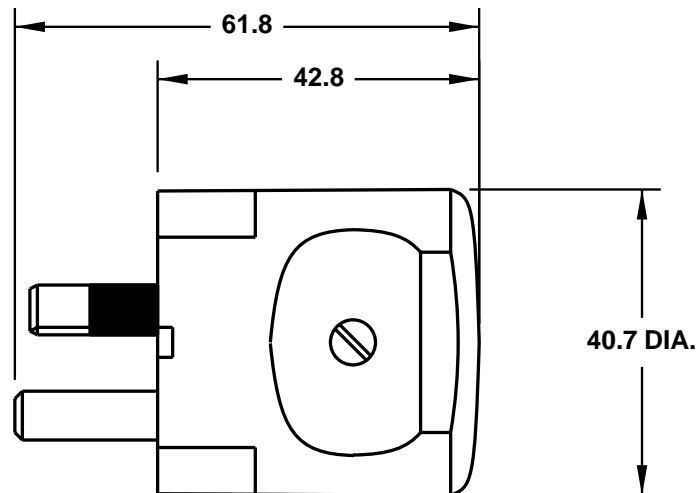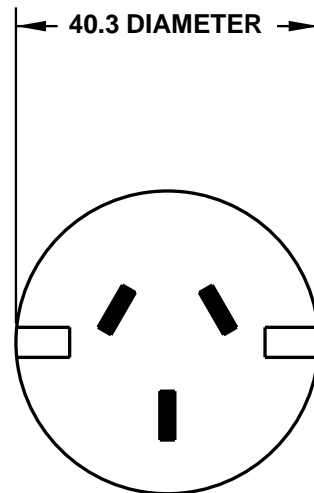

www.InternationalConfig.com
sales@internationalconfig.com