

CAT. No.  
**74141**

**AUSTRALIAN PLUG (INSULATED LINE/NEUTRAL BLADES), STRAIGHT CORD GRIP, CLEAR, 2 POLE 3 WIRE  
GROUNDING, 10 AMPERE 250 VOLT, (AU 1-10P).  
STANDARD: AS/NZS 3112**


APPROVALS: DEPARTMENT OF FAIR TRADING

**ALL DIMENSIONS ARE IN MILLIMETERS**



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 11 DIA (0.433")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 11 DIA (0.433")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	60	9
BLUE	NEUTRAL	60	9
BROWN	LINE	60	9

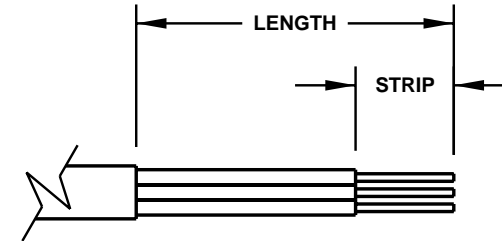

**CORDAGE PREPARATION**

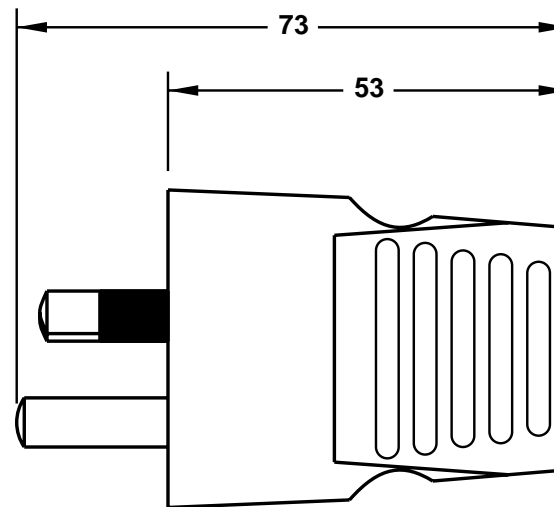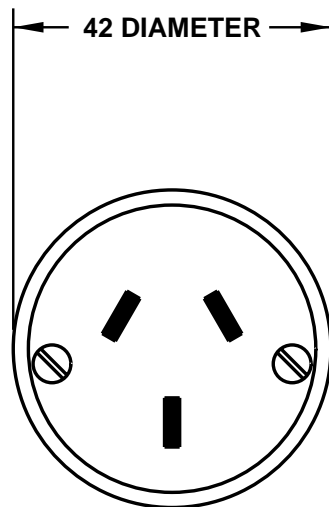

[www.InternationalConfig.com](http://www.InternationalConfig.com)  
[sales@internationalconfig.com](mailto:sales@internationalconfig.com)