


CAT. No.  
74560-NS

AUSTRALIAN CONNECTOR, STRAIGHT CORD GRIP, WHITE, 2 POLE 3 WIRE, 15 AMPERE 250 VOLT.

APPROVALS DEPT. of FAIR TRADING   
STANDARDS AS 3112

**CONFIGURATIONS**


RECEPTACLE PLUG



AU2-15R AU2-15P

15 AMPERE 250 VOLT AUSTRALIAN RECEPTACLE AND PLUG POLARIZED (AS/NZS 3112)  
NOTE: RECEPTACLE ALSO ACCEPTS AU1-10P (10 AMPERE 250 VOLT) PLUG.

ALL DIMENSIONS ARE IN MILLIMETERS

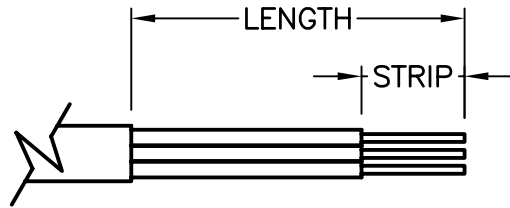


CORDAGE PREPARATION

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF =  $\phi 9.5$  (0.375")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = N/A  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 mm<sup>2</sup> (12 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	50	6
BLUE	NEUTRAL	50	6
BROWN	LINE	50	6

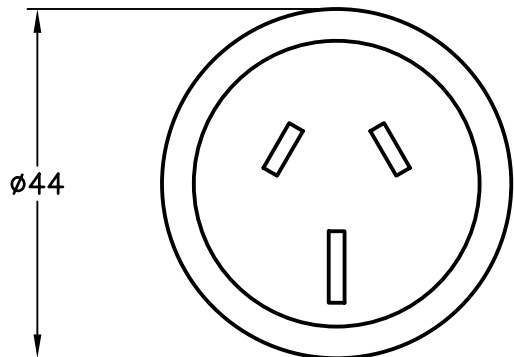

AU2-15R

