

CAT. No.

74560

AUSTRALIAN CONNECTOR BODY, STRAIGHT CORD GRIP, WHITE, 2P 3W, 15A 250V, (AU2-15R)

APPROVALS

DEPT. of FAIR TRADING

CERTIFICATIONS


ROHS

STANDARDS

AS/NZS 3112

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 mm<sup>2</sup> (14 AWG)



CORDAGE PREPARATION

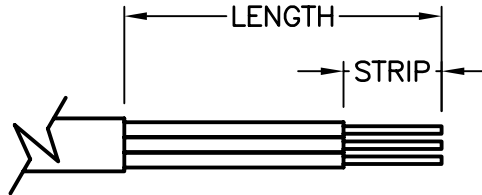

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN/YELLOW	GROUND	40	8
BLUE	NEUTRAL	40	8
BROWN	LINE	40	8

CORDAGE PREPARATION

ALL DIMENSIONS ARE IN MILLIMETERS

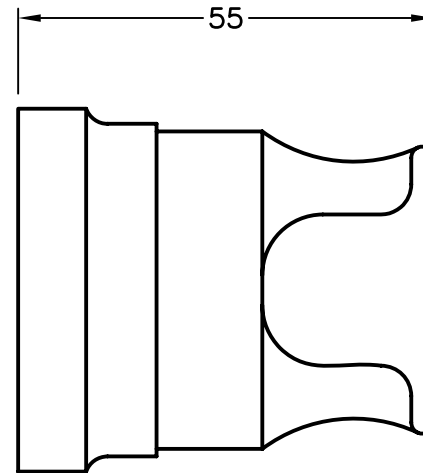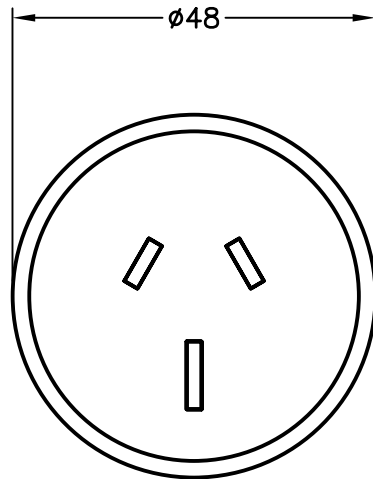

AU2-15R