

CAT. No.
75130

ITALIAN PLUG, ANGLE CORD GRIP, BLACK, 2 POLE 3 WIRE GROUNDING, 10 AMPERE 250 VOLT, (IT1-10P)
STANDARD: CEI-16/VII - 1971

APPROVALS / CERT'S.


IMQ

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	35	8
BLUE	NEUTRAL	25	8
BROWN	LINE	50	8

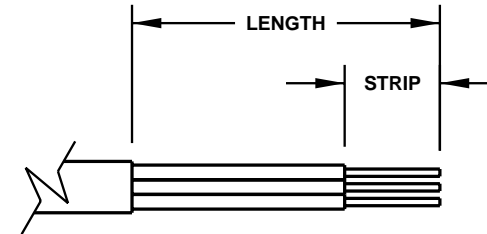

CORDAGE PREPARATION

