

CAT. No.
75160

ITALIAN CONNECTOR, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE, 10 AMPERE 250 VOLT, (IT1-10R AND IT2-16R).

STANDARD: CEI-16/VII - 1971

APPROVALS / CERT'S.


IMQ

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

| <u>CONDUCTOR INSULATION COLOR</u> | <u>CONDUCTOR COLOR CODE</u> | <u>"LENGTH"</u> | <u>"STRIP"</u> |
|-----------------------------------|-----------------------------|-----------------|----------------|
| GREEN / YELLOW | GROUND | 20 | 10 |
| BLUE | NEUTRAL | 30 | 10 |
| BROWN | LINE | 30 | 10 |

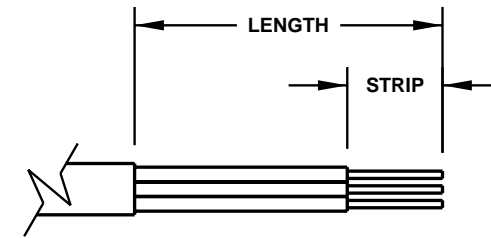

CORDAGE PREPARATION

