

CAT. No.

76560

SWISS CONNECTOR T-23 TYPE, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE, 16 AMPERE 250 VOLT, (SW2-16R)

APPROVALS

SEV

STANDARDS

SEV 1011


CERTIFICATIONS

ROHS


CONFIGURATIONS

RECEPTACLE

PLUG





SW2-16R



SW2-16P



16 AMPERE 250 VOLT SWISS Receptacle and plug. Polarized. 4.0 x 5.0 mm pins. (SEV 1011. 1959)

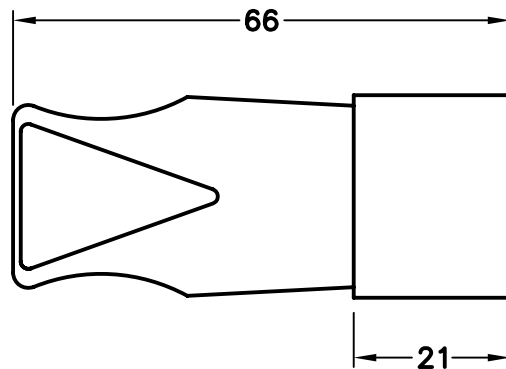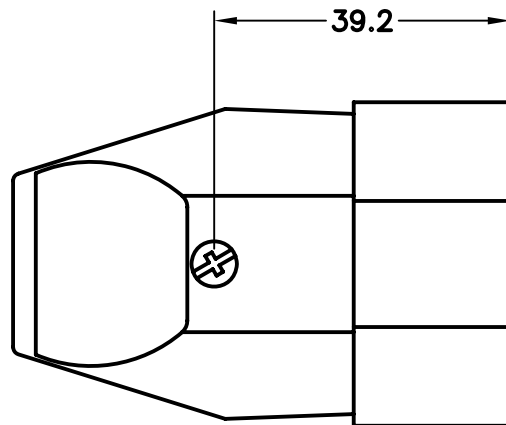

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 11 DIA (0.433")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	15	6
BLUE	NEUTRAL	25	6
BROWN	LINE	25	6

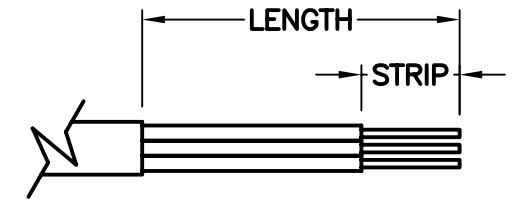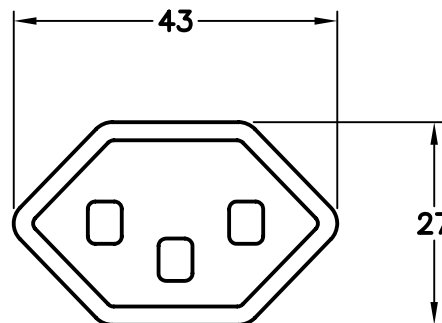

CORDAGE PREPARATION