


CAT. No.

**77130**

ISRAELI PLUG, ANGLE CORD GRIP, WHITE, 2 POLE 3 WIRE, 16 AMPERE 250 VOLT, (IS1-16P)

APPROVALS	SII <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>
STANDARDS	SI 32 <input checked="" type="checkbox"/>

**CONFIGURATIONS**  
RECEPTACLE      PLUG




16 AMPERE 250 VOLT  
Israeli  
Receptacle and plug.  
Polarized.  
(SI 32)  
NOTE: Receptacle also accepts  
Europlug with 4.0 mm diameter  
pins.

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	20	5
BLUE	NEUTRAL	30	5
BROWN	LINE	30	5

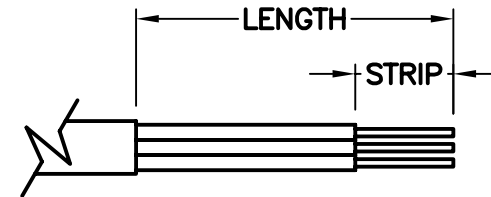

CORDAGE PREPARATION

