

CAT. No.

77140

ISRAELI PLUG, STRAIGHT CORD GRIP, WHITE, 2 POLE 3 WIRE GROUNDING, RATED 16 AMPERE 250 VOLT, (IS1-16P)

APPROVALS

SII


CERTIFICATIONS

ROHS


STANDARDS

SI 32

CONFIGURATIONS
RECEPTACLE PLUG



IS1-16R



IS1-16P


16 AMPERE 250 VOLT
Israeli
Receptacle and plug.
Polarized.
(SI 32)
NOTE: Receptacle also accepts
Europlug with 4.0 mm diameter
pins.

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = N/A
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 7 DIA (0.276")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	30	5
BLUE	NEUTRAL	30	5
BROWN	LINE	30	5

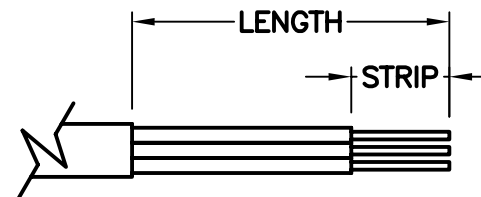

CORDAGE PREPARATION

