

CAT. No.

**78140-HG**

DANISH, DE3-13P HOSPITAL GRADE PLUG, STRAIGHT CORD GRIP, GRAY, 2P 3W, 13A 250V

APPROVALS	DEMKO <input checked="" type="checkbox"/>
STANDARDS	AFSNIT 107-2-D1 <input checked="" type="checkbox"/>
CERTIFICATIONS	CE <input checked="" type="checkbox"/> ROHS <input checked="" type="checkbox"/>



**CONFIGURATIONS**

RECEPTACLE      PLUG

DE3-13R      DE3-13P

13 AMPERE 250 VOLT DANISH (HOSPITAL GRADE) RECEPTACLE AND PLUG. POLARIZED. (AFSNIT 107-2-D1)


ALL DIMENSIONS ARE IN MILLIMETERS

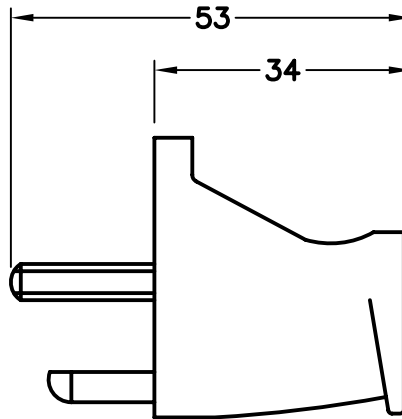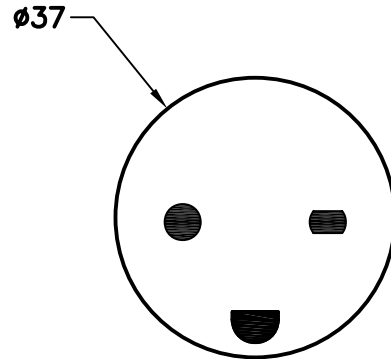

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 7 DIA (0.276")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	20	5
BLUE	NEUTRAL	30	5
BROWN	LINE	30	5

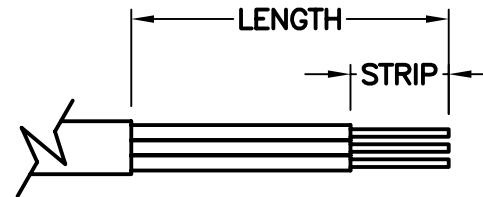

CORDAGE PREPARATION