

CAT. No.

78160-BLK

DANISH CONNECTOR, STRAIGHT CORD GRIP, (DE1-13P), 13 AMPERE-250 VOLT, BLACK, 2 POLE 3 WIRE, SEMKO APPROVED.


APPROVALS	SEMKO <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>
STANDARDS	AFSNIT 107 <input checked="" type="checkbox"/>

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 12 DIA (0.472")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 11 DIA (0.433")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 1.5 mm<sup>2</sup> (16 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	30	6
BLUE	NEUTRAL	30	6
BROWN	LINE	30	

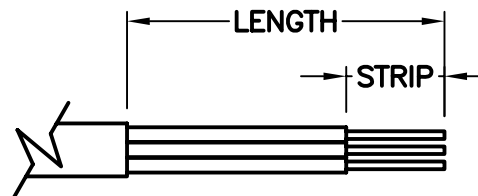

CORDAGE PREPARATION

