

CAT. No.
78530

JAPANESE STRAIGHT PLUG, BLACK, 2POLE3WIRE GROUNDING, 15 AMPERE 125 VOLT, (JA1-15P)

APPROVALS / CERT'S.


PSE 

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	45	12
BLUE	NEUTRAL	45	12
BROWN	LINE	45	12

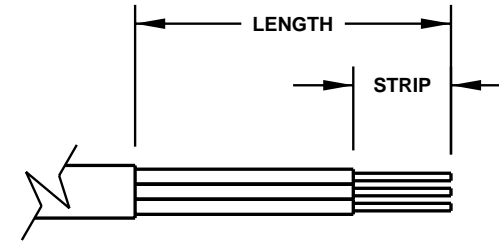

CORDAGE PREPARATION

