

CAT. No.

80301

DETACHABLE CORD SET, AUSTRALIAN AU2-15P PLUG & IEC60320 C-19 CONNECTOR, 15A 250V, 70 DEGREE C, BLACK, 2.5 METERS LONG.

APPROVALS

SAA

CERTIFICATIONS

REACH

ROHS

ROHS2


CE

STANDARDS



AS/NZS 3112

SPECIFICATIONS:

1. OVERALL LENGTH: 2.5 METERS
2. CONDUCTORS: 1.5mm<sup>2</sup> x 3 WITH IEC COLOR CODE (GREEN/YELLOW, BLUE, BROWN)
3. JACKET: GTSA 3G, 1.5mm<sup>2</sup>, N/15823, H05W-F 3G, 1.5mm<sup>2</sup>, BLACK
4. PLUG: AS/NZS 3112, (INSULATED LINE/NEUTRAL BLADES), STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C-19, STRAIGHT, BLACK
6. RATED: 15 AMPERE 250 VOLT
7. TEMP RATING: 75° C



AU2-15P  
AS/NZS 3112

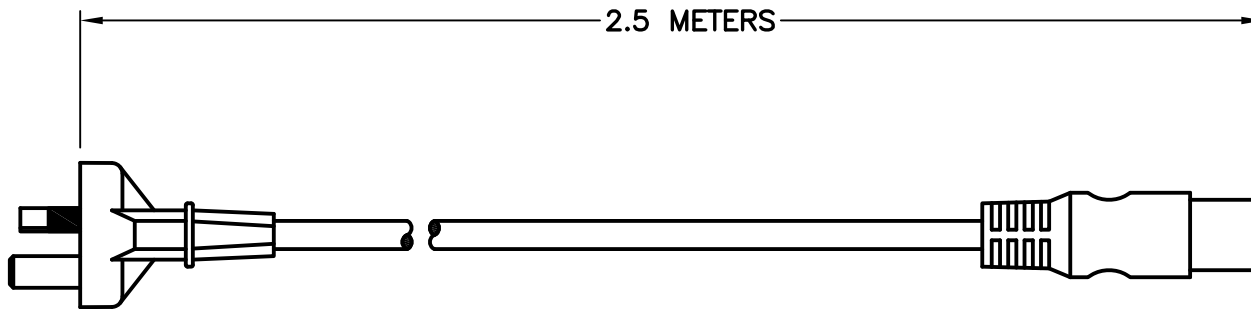

IEC 60320  
C-19

International Configurations, Inc. P.O. Box 3374 Enfield, Connecticut 06083 TEL (860)749-6380 FAX (860)749-2985

www.InternationalConfig.com

sales@internationalconfig.com

Copyright 2015 International Configurations, Inc. All Right Reserved ©