

CAT. No.


83221-RASA

AUDI ARABIA, UNITED KINGDOM, HONG KONG, SINGAPORE, MALAYSIA 10 AMPERE 250 VOLT DETACHABLE POWER CORD, TYPE G BS 1363A PLUG (SA1-13P, UK1-13P), 10 AMPERE BS 1362 FUSE, RIGHT ANGLE IEC 60320 C-13 CONNECTOR, 2 POLE-3 WIRE GROUNDING (2P+E), 2.5 METERS (8FT.-2IN.) LONG. BLACK.


APPROVALS	SASO 2203/2815 (SAUDI ARABIA) <input type="checkbox"/>	ASTA (UNITED KINGDOM) <input type="checkbox"/>	HKSI (HONG KONG) <input checked="" type="checkbox"/>	PSB (SINGAPORE) <input checked="" type="checkbox"/>	MS (MALAYSIA) <input checked="" type="checkbox"/>	ENEC 10 (VDE) <input checked="" type="checkbox"/>
CERTIFICATIONS	SASO 2203/2815 (SAUDI ARABIA) <input checked="" type="checkbox"/>	ASTA BS 1363A (UNITED KINGDOM) <input checked="" type="checkbox"/>	HKSI (HONG KONG) <input checked="" type="checkbox"/>	PSB (SINGAPORE) <input checked="" type="checkbox"/>	MS (MALAYSIA) <input checked="" type="checkbox"/>	
	IEC 60320 C-13 <input checked="" type="checkbox"/>	REACH <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	ROHS2 <input checked="" type="checkbox"/>		
STANDARDS	SASO 2203/2815 (SAUDI ARABIA) <input checked="" type="checkbox"/>	BS 1363A (UNITED KINGDOM) <input checked="" type="checkbox"/>	HKSI (HONG KONG) <input checked="" type="checkbox"/>	PSB (SINGAPORE) <input checked="" type="checkbox"/>	MS (MALAYSIA) <input checked="" type="checkbox"/>	

SPECIFICATIONS:

- 1. OVERALL LENGTH: 2.5M (8FT.-2IN.)
- 2. CONDUCTORS: 1.0 mm² x 3 WITH IEC COLOR CODE (GREEN/YELLOW, BLUE, BROWN)
- 3. JACKET: H05VV-F, BLACK
- 4. PLUG: SASO 2203, 10 AMPERE FUSED, ANGLE, BLACK
- 5. CONNECTOR: IEC 60320 C-13, RIGHT-ANGLE, BLACK
- 6. RATED: 10 AMPERE 250 VOLT

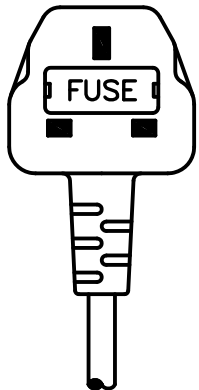

SA1-13P
SASO 2203

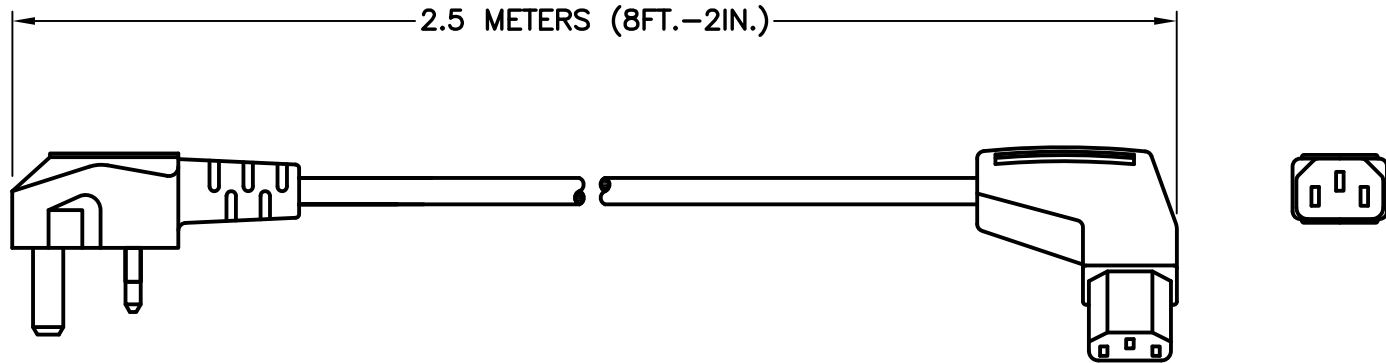

IEC 60320 C-13