

CAT. No.

888-204

IEC 309 CEE 17 PLUG WITH CABLE SLEEVE, RED, 30 AMPERE 250 VOLT (UL / CSA);
 32 AMPERE 230 / 400 VOLT 6H (EUROPEAN), 50 / 60 HZ, 3 POLE + NEUTRAL + EARTH
 STANDARDS: IEC 309-1, IEC 304-2, BS 4343, DIN 49462/63, VDE 0623, CEE 17, EN 60309


APPROVALS/CERT'S. CSA DEMKO FI KEMA NEMKO OVE SEMKO UL CLASSIFIED VDE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 24 DIA (0.945")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 24 DIA (0.945")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 10.0 (8 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	55	13
BLUE	NEUTRAL	55	13
BROWN	LINE #1	55	13
BLACK	LINE #2	55	13
BLACK	LINE #3	55	13

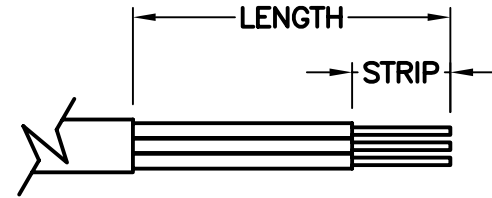

CORDAGE PREPARATION

