

CAT. No.

888-21000

IEC 60309 SPLASHPROOF (IP44) PLUG WITH CABLE SLEEVE, 4H, YELLOW COLOR, 20 AMPERE-125 VOLT, (UL / CSA), CE MARK, 2P+E.

APPROVALS

CSA  UL

CERTIFICATIONS

CE  ROHS

STANDARDS


IEC 60309

ALL DIMENSIONS ARE IN MILLIMETERS


MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 15 DIA (0.591")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 15 DIA (0.591")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	30	10
BLUE	NEUTRAL	35	10
BROWN	LINE	35	10

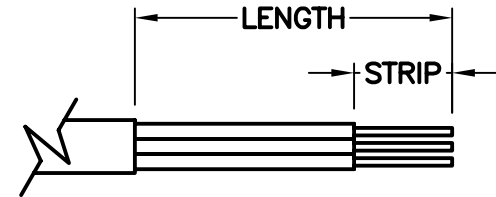

CORDAGE PREPARATION



IEC 60309. 4H

