

CAT. No.
888-304

IEC 309 CEE 17 CONNECTOR WITH CABLE SLEEVE, RED, 30 AMPERE 250 VOLT (UL / CSA);
32 AMPERE 230 / 400 VOLT 6H (EUROPEAN), 50 / 60 HZ, 3 POLE + NEUTRAL + EARTH
STANDARDS: IEC 309-1, IEC 304-2, BS 4343, DIN 49462/63, VDE 0623, CEE 17, EN 60309


APPROVALS / CERT'S. DEMKO FI KEMA NEMKO OVE SEMKO UL CLASSIFIED VDE

ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 24 DIA (0.945")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 24 DIA (0.945")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 10.0 (8 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	40	10
BLUE	NEUTRAL	45	10
BROWN	LINE #1	45	10
BLACK	LINE #2	45	10
BLACK	LINE #3	45	10

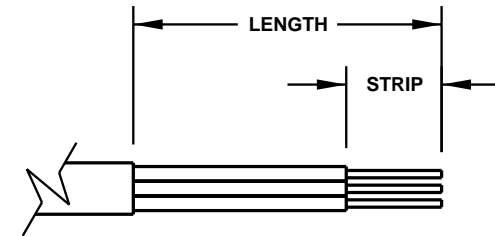

CORDAGE PREPARATION

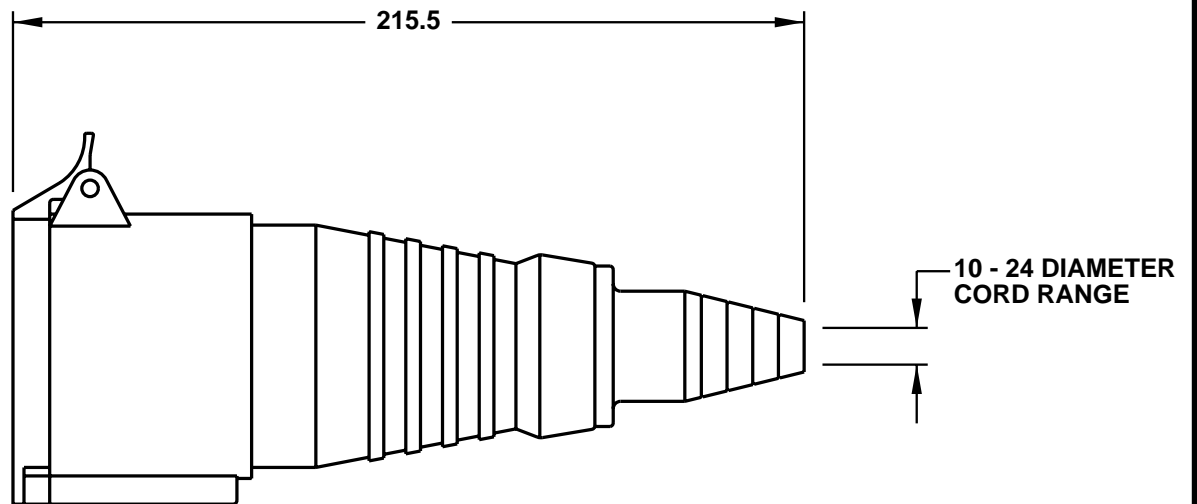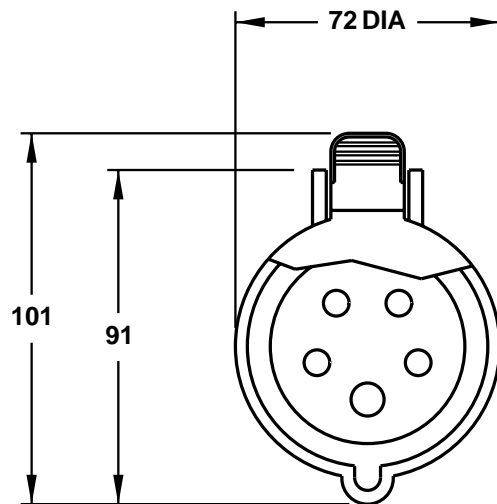

NOTE: FOR CLARITY THIS VIEW IS SHOWN WITH LIFT LID BROKEN