

CAT. No.

888-31000

IEC 60309 SPLASHPROOF (IP44) CONNECTOR WITH CABLE SLEEVE, 4H, YELLOW COLOR, 20 AMPERE-125 VOLT, (UL / CSA) CE MARK, 2P+E.


APPROVALS	CSA <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>
CERTIFICATIONS	CE <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>
STANDARDS	IEC 60309 <input checked="" type="checkbox"/>	

ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 16 DIA (0.630")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 16 DIA (0.630")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	30	10
BLUE	NEUTRAL	35	10
BROWN	LINE	35	10

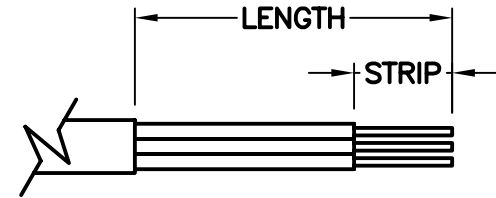

CORDAGE PREPARATION

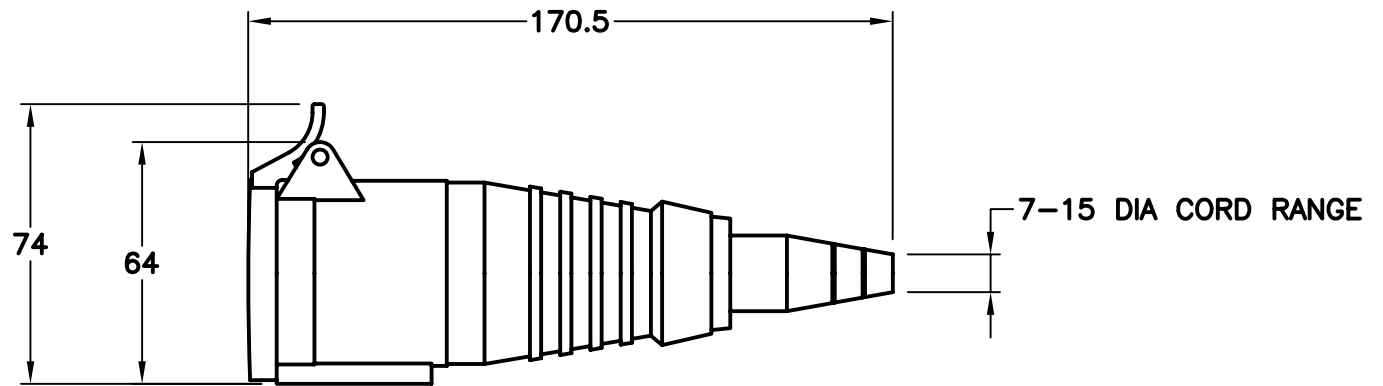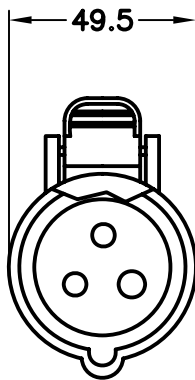

IEC 60309. 4H

NOTE: FOR CLARITY THIS VIEW IS SHOWN WITH LIFT LID BROKEN