

CAT. No.
888-3199


**IEC 309 CEE 17 CONNECTOR, WATERTIGHT, RED (4 POLE-5WIRE), 100 AMPERE 250 VOLT (UL/CSA);
125 AMPERE, 6h-230-400 VOLT (EUROPEAN), 50/60HZ , 3 POLE + NEUTRAL + EARTH
STANDARDS: IEC 309-1, IEC 304-2, BS 4343, DIN 49462/63, VDE 0623, CEE 17, EN 60309**

APPROVALS / CERT'S. CSA UL CLASSIFIED VDE


ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 48 DIA (1.890")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 48 DIA (1.890")
 MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 120.0 (4/0 AWG)

| CORDAGE PREPARATION | | | |
|-----------------------------------|-----------------------------|-----------------|----------------|
| <u>CONDUCTOR INSULATION COLOR</u> | <u>CONDUCTOR COLOR CODE</u> | <u>"LENGTH"</u> | <u>"STRIP"</u> |
| GREEN / YELLOW | GROUND | 90 | 35 |
| BLUE | NEUTRAL | 100 | 35 |
| BROWN | LINE #1 | 100 | 35 |
| BLACK | LINE #2 | 100 | 35 |
| BLACK | LINE #3 | 100 | 35 |

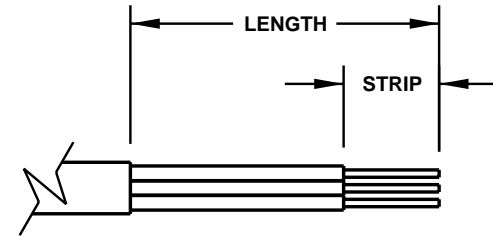

CORDAGE PREPARATION

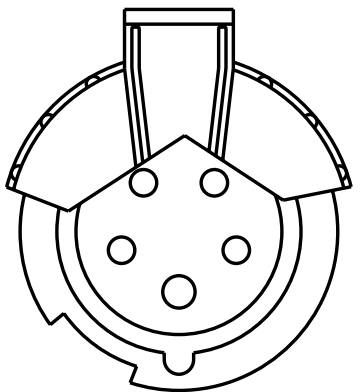

NOTE: FOR CLARITY THIS VIEW IS SHOWN WITH LIFT LID BROKEN

