

CAT. No.

90530

DETACHABLE "UNIVERSAL" CORD SET, IEC 60320 C-20 PLUG & C-19 CONNECTOR, 15 AMPERE 250 VOLT (UL/C-UL), 16 AMPERE 250 VOLT (VDE), SJTO, 105°C, (14/3 AWG, 3x2.08mm²) - (H05VV-F, 1.5 mm²), BLACK, 2.5 METERS (8FT.-2IN.) LONG, 2 POLE-3 WIRE GROUNDING.

APPROVALS

C(UL)US VDE

CERTIFICATIONS

REACH ROHS ROHS2 CE

STANDARDS

IEC 60320

CONFIGURATIONS

RECEPTACLE

PLUG




15 AMPERE 250 VOLT
UL/CSA
16 AMPERE 250 VOLT
INTERNATIONAL

IEC 60320
C-19

IEC 60320
C-20

SPECIFICATIONS:

1. OVERALL LENGTH: 2.5 METER (8FT.-2IN.)
2. CONDUCTORS: 14/3 AWG, 3x2.08mm² - H05VV-F, 1.5 mm²
3. JACKET: H05VV-F (SJTO), 105°C, BLACK
4. PLUG: IEC 60320 C-20, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C-19, STRAIGHT, BLACK
6. RATED: 15/16 AMPERE 250 VOLT

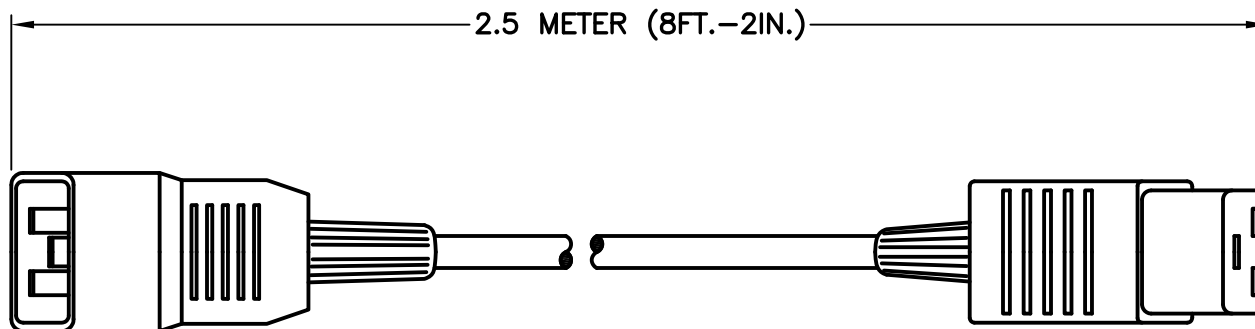

IEC 60320 C-20

IEC 60320 C-19