



CAT. No.

90545x5M


DETACHABLE "UNIVERSAL" CORD SET, IEC 60320 C-20 PLUG & C-19 CONNECTOR, 15A-250V (UL/C-UL), 16A 250V (VDE), SJTO, 105°C, 14/3 AWG - H05VV-F, 1.5 mm², BLACK, 5 METERS LONG (16.5 FT) 2 POLE 3 WIRE GROUNDING.

APPROVALS	C-UL <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>
CERTIFICATIONS	CE <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	
STANDARDS	IEC 60320 <input checked="" type="checkbox"/>		

CONFIGURATIONS		
RECEPTACLE	PLUG	
		15 AMPERE 250 VOLT UL/CSA
IEC 60320 C-19	IEC 60320 C-20	16 AMPERE 250 VOLT INTERNATIONAL

SPECIFICATIONS:

1. OVERALL LENGTH: 5 METERS
2. CONDUCTORS: 1.5 mm x 3 (14 AWG x 3)
3. JACKET: H05VV-F (SJTO), 105°C, BLACK
4. PLUG: IEC 60320 C-20, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C-19, STRAIGHT, BLACK
6. RATED: 15/16 AMPERE 250 VOLT

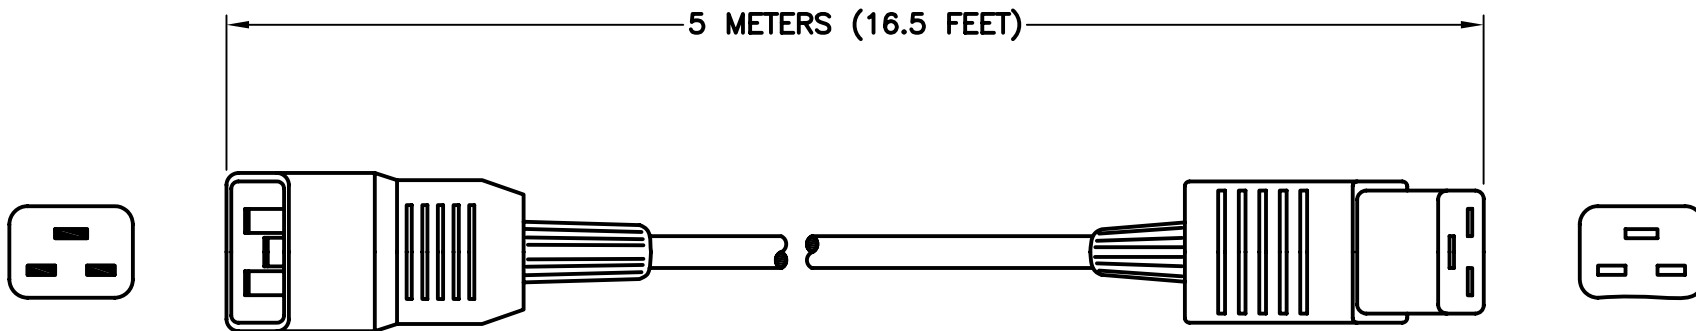

IEC 60320. C-20

IEC 60320. C-19