



CAT. No.

90630


"UNIVERSAL" POWER SUPPLY CORD, IEC60320 C-19 CONN., 15A-250V (UL/C-UL), 16A 250V (VDE) SJTO, 105°C, 14/3 AWG- H05VV-F, 1.5mm², BLACK, 2.5 METERS (8 FT. 2 IN.), ROJ=2 IN. STRIP=1/4 IN. 2 POLE 3 WIRE GROUNDING.

| | | | |
|----------------|---|--|---|
| APPROVALS | C-UL <input checked="" type="checkbox"/> | UL <input checked="" type="checkbox"/> | VDE <input checked="" type="checkbox"/> |
| CERTIFICATIONS | CE <input checked="" type="checkbox"/> | ROHS <input checked="" type="checkbox"/> | |
| STANDARDS | IEC 60320 <input checked="" type="checkbox"/> | | |

| CONFIGURATIONS | |
|---|---|
| RECEPTACLE | PLUG |
|  |  |
| IEC 60320 C-19 | IEC 60320 C-20 |
| | 15 AMPERE 250 VOLT UL/CSA 16 AMPERE 250 VOLT INTERNATIONAL |

SPECIFICATIONS:

1. OVERALL LENGTH: 2.5 METERS
2. CONDUCTORS: 1.5 mm x 3 (14 AWG x 3)
3. JACKET: H05VV-F (SJTO), 105°C, BLACK
4. PLUG: NONE
5. CONNECTOR: IEC 60320 C-19, STRAIGHT, BLACK
6. RATED: 15/16 AMPERE 250 VOLT

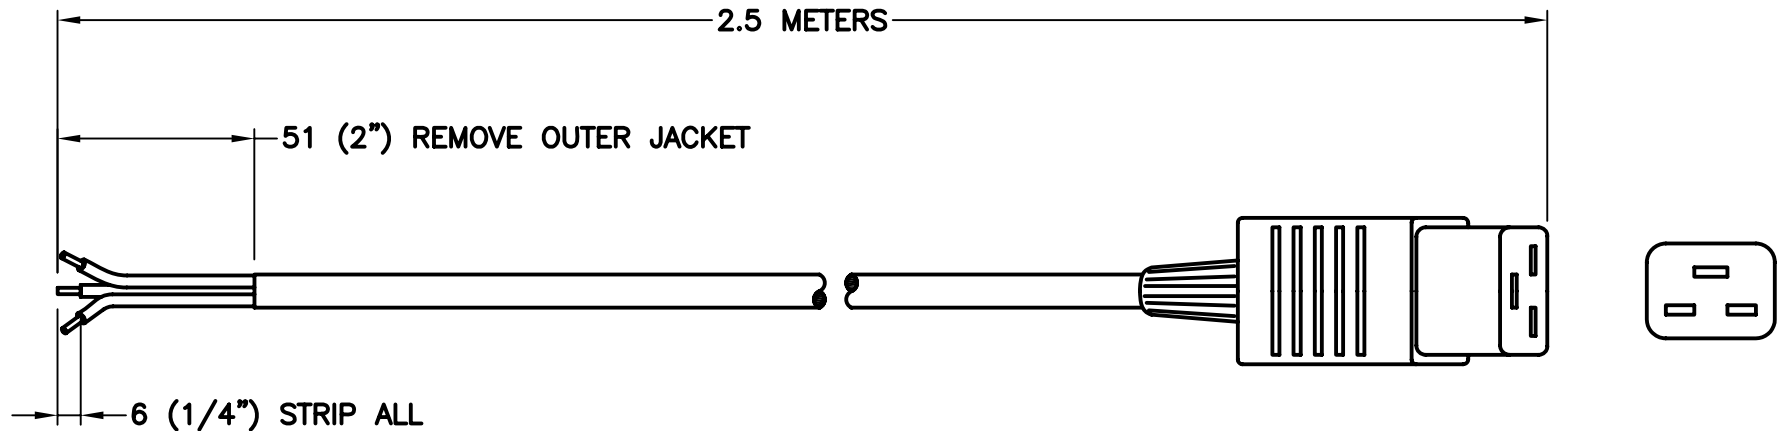

IEC 60320, C-19