

CAT. No.
L520P

NEMAL5-20P STRAIGHT PLUG, BLACK, 2 POLE 3 WIRE GROUNDING, 20 AMPERE 125 VOLT

APPROVALS / CERT'S.

CSA

UL


UL/FS

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	15	6
BLUE	NEUTRAL	25	6
BROWN	LINE	25	6

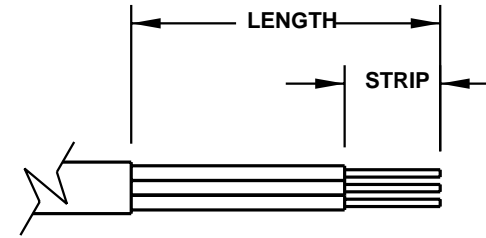

CORDAGE PREPARATION

