

CAT. No.
L530P

NEMAL5-30P STRAIGHT PLUG, BLACK, 2 POLE 3 WIRE GROUNDING, 30 AMPERE 125 VOLT


APPROVALS / CERT'S. | CSA | UL | UL/FS

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 23 DIA (0.906")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 23 DIA (0.906")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	45	12
BLUE	NEUTRAL	45	12
BROWN	LINE	45	12

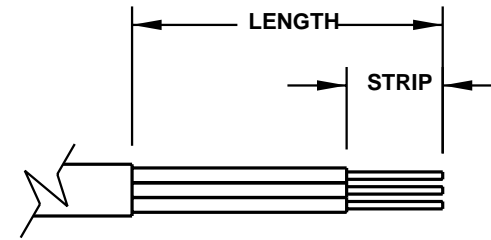

CORDAGE PREPARATION

