

CAT. No.  
**L620C**

NEMAL6-20R STRAIGHT CONNECTOR, BLACK, 2 POLE 3 WIRE GROUNDING, 20 AMPERE 250 VOLT

APPROVALS / CERT'S.

CSA

UL


UL/FS

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 23 DIA (0.906")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 23 DIA (0.906")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	38	12
BLUE	NEUTRAL	38	12
BROWN	LINE	38	12

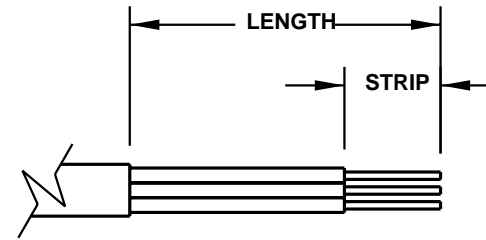

**CORDAGE PREPARATION**

