

CAT. No.
L620P

NEMAL6-20P STRAIGHT PLUG, BLACK, 2 POLE 3 WIRE GROUNDING, 20 AMPERE 250 VOLT

APPROVALS / CERT.'S.

CSA

UL


UL/FS

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 23 DIA (0.906")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 23 DIA (0.906")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	38	12
BLUE	NEUTRAL	38	12
BROWN	LINE	38	12

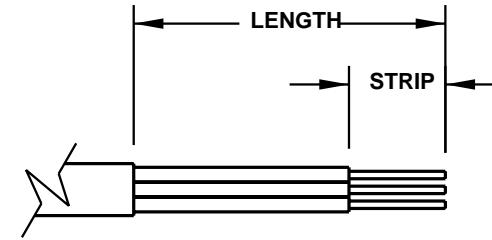

CORDAGE PREPARATION

