

CAT. No.  
**L630P**

**NEMAL6-30P STRAIGHT PLUG, BLACK, 2 POLE 3 WIRE GROUNDING, 30 AMPERE 250 VOLT**

APPROVALS / CERT'S.

CSA

UL


UL/FS

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 23 DIA (0.906")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 23 DIA (0.906")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	38	12
BLUE	NEUTRAL	38	12
BROWN	LINE	38	12

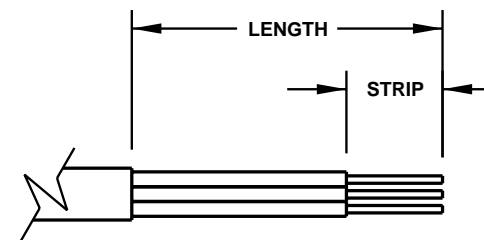

**CORDAGE PREPARATION**

