

EUROPEAN “SCHUKO” CORD SETS & POWER CORDS

16 Ampere 250 Volt, 2 Pole 3 Wire Grounding EU1-16P



16 A / 250 V


2.5 Ampere 250 Volt, 2 Pole 2 Wire Europlug



2.5 A / 250 V





General Specification Data

Conductor Color Code: Brown, Blue, Green/Yellow (3 wire); Brown, Blue (2 wire)
Plug Standards: CEE 7-7, CEE 7/16 (Non-Polarized)
Conductor Size / Rating: 0.75 mm² @6 Ampere, 1.0 mm² @ 10 Ampere, 1.5 mm² @ 16 Ampere
Jacket O.D. (Approx.): 6.4 mm = 3 x 0.75 mm², 7.2 mm = 3 x 1.0 mm², 8.3 mm = 3 x 1.5 mm²
Material: PVC, Jacket Color Black, Temperature 70°C.
Connector Standards: IEC 60320 (320) C-13, C-19, C-5, C-7, C-15
Cordage Standards: H05VV-F3G, H03VV-F3, H03VV-H2, H05VV-H2, H05VV-F2, CENELEC HD-21 (HAR)
Cord Set Length: 2.5 meters/8'-2", 1.8 meters/6'





Power Cord - Detachable Cord Sets

Catalog #	Rating	Description	Length	Approvals
81641 ⁽¹⁾	10 A 250 V	Straight C-13 connector	2.5 m	22 and (A)
81641-LA ⁽¹⁾	10 A 250 V	Left angle C-13 connector	2.5 m	22 and (A)
81641-RA ⁽¹⁾	10 A 250 V	Right angle C-13 connector	2.5 m	22 and (A)
		Cordage - H05VV-F3G 1.0 mm ²		
80151	16 A 250 V	Straight C-19 connector	2.5 m	22 and (A)
80151-LA	16 A 250 V	Left angle C-19 connector	2.5 m	22 and (A)
80151-RA	16 A 250 V	Right angle C-19 connector	2.5 m	22 and (A)
		Cordage - H05VV-F3G 1.5 mm ²		
81953	2.5 A 250 V	Straight C-5 connector	1.8 m	22 and (A)
		Cordage - H03VV-F3 0.75 mm ²		
81900	2.5 A 250 V	Straight C-7 connector	1.8 m	22 and (A)
		Cordage - H03VV-H2 0.75 mm ²		

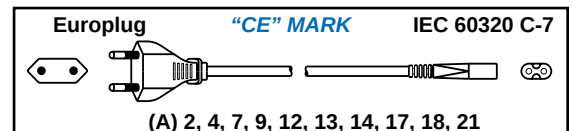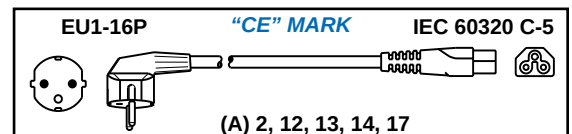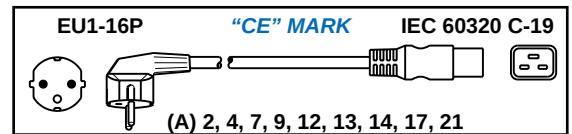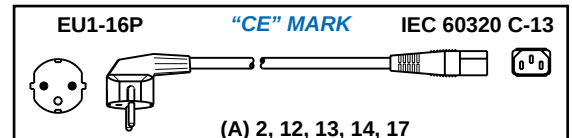

Power Supply Cords

Catalog #	Rating	Description	Conductors	Length	Approvals
81520 ⁽¹⁾	6 A 250 V	Angle plug	0.75 mm ²	2.5 m	22 and (A)
81550 ⁽¹⁾	10 A 250 V	Angle plug	1.0 mm ²	2.5 m	22 and (A)
81580 ⁽¹⁾	16 A 250 V	Angle plug	1.5 mm ²	2.5 m	22 and (A)
		Cordage - H05VV-F3G			
90400	2.5 A 250 V	6.4 mm diameter cord		1.8 m	22 and (A)
		Cordage - H05VV-F2 0.75 mm ²			
90200	2.5 A 250 V	3.4 x 5.6 oval cord		1.8 m	22 and (A)
		Cordage - H03VV-H2F2 0.75 mm ²			

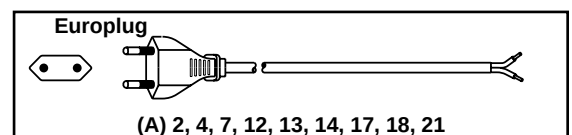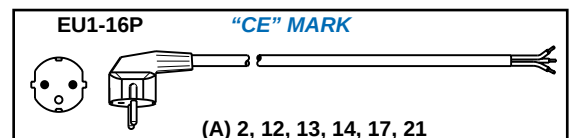

(1) Add suffix “-RUS” for Russia. Plug has 4.0 mm size pins.

- Black standard color. White and gray available.
- Various terminals, custom stripping, hanked cords available.
- Custom lengths and shielded cords available.
- IEC 60320 C-15 120°C type connector available on some models.

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI



International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985
 InternationalConfig.com • Sales@InternationalConfig.com

© 2009 International Configurations, Inc. Entire contents of this catalog copyrighted.