

JAPANESE CORD SETS & POWER CORDS

15 Ampere 125 Volt, 2 Pole 3 Wire Grounding JA1-15P



15 A / 125 V

7 Ampere 125 Volt, 2 Pole 2 Wire (Non-Grounding).....




2.5 A / 125 V

PSE





General Specification Data

Conductor Color Code: Black, White, Green/Yellow (3 wire)
Plug Standards: JIS 8303
Conductor Size / Rating: 0.75 mm² @7 Ampere, 1.25 mm² @ 12 Ampere, 2.0 mm² @ 15 Ampere
Jacket O.D. (Approx.): 8.0 mm = 3 x 0.75 mm², 8.7 mm = 3 x 1.25 mm², 9.3 mm = 3 x 2.0 mm²
Material: PVC, Jacket Color Black, Temperature 70°C, 105°C.
Connector Standards: IEC 60320 (320) C-13, C-19, C-5, C-7
Cordage Standards: VCTF, HVCTF, VFF
Cord Set Length: 2.5 meters/8'-2", 1.8 meters/6'




Power Cord - Detachable Cord Sets

Catalog #	Rating	Description	Length	Approvals
81200	12 A 125 V	Straight C-13 connector	2.5 m	5
81202	15 A 125 V	Straight C-13 connector Cordage - HVCTF 1.25 mm ² 70°C, 12 Ampere Cordage - HVCTF 2.00 mm ² 105°C, 15 Ampere	2.5 m	5
80650	15 A 125 V	Straight C-19 connector Cordage - VCTF 2.00 mm ² 15 Ampere	2.5 m	5
81295	7 A 125 V	Straight C-5 connector Cordage - VCTF 0.75 mm ²	1.8 m	5
82900	7 A 125 V	Straight C-7 connector Cordage - VFF 0.75 mm ²	1.8 m	5

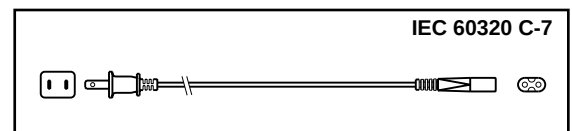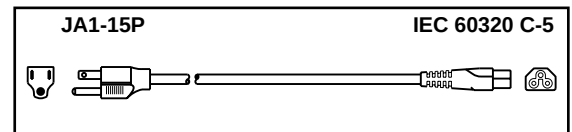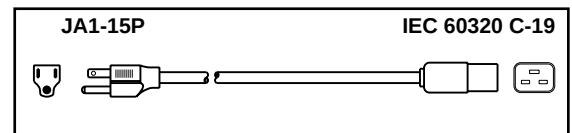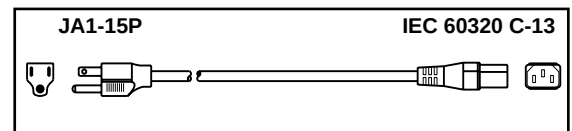

Power Supply Cords

Catalog #	Rating	Description	Conductors	Length	Approvals
81240	7 A 125 V	Straight plug	0.75 mm ²	2.5 m	5
81250	12 A 125 V	Straight plug	1.25 mm ²	2.5 m	5
81260	15 A 125 V	Straight plug Cordage - VCTF, HVCTF	2.00 mm ²	2.5 m	5

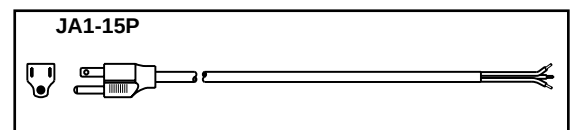

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI



International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985
 InternationalConfig.com • Sales@InternationalConfig.com

© 2009 International Configurations, Inc. Entire contents of this catalog copyrighted.