

NORTH AMERICAN CORD SETS & POWER CORDS

15 Ampere 250 Volt, 2 Pole 3 Wire Grounding NEMA 6-15P



15 A / 250 V

General Specification Data

Conductor Color Code: North American (N.A.) Black (Line), White (Neutral), Green (Ground)
International (Int'l.) Brown (Line), Blue (Neutral), Green/Yellow (Ground)

Plug Standards: UL 498, CSA, NEMA, ANSI

Conductor Size / Rating: 14 AWG @ 15 Ampere


Jacket O.D. (Approx.): 14 AWG = .370"

Material: PVC, Jacket Color Black, Temperature 60°C & 105°C

Connector Standards: IEC 60320 (320) C-13, C-19



Cordage Standards: SJTO, SJT

Cord Set Length: 2.5 meters/8'-2"




Power Cord - Detachable Cord Sets

Catalog #	Rating	Description	Length	Approvals
81300	15 A 250 V	Straight C-13 connector	2.5 m	3, 20
81300-LA	15 A 250 V	Left angle C-13 connector	2.5 m	3, 20
81300-RA	15 A 250 V	Right angle C-13 connector	2.5 m	3, 20
		SJTO Cordage - 14/3 AWG 105°C		
80500 ⁽¹⁾	15 A 250 V	Straight C-19 connector	2.5 m	3, 20
80500-LA ⁽²⁾	15 A 250 V	Left angle C-19 connector	2.5 m	3, 20
80500-RA ⁽²⁾	15 A 250 V	Right angle C-19 connector	2.5 m	3, 20
		(1) SJTO Cordage - 14/3 AWG 105°C		
		(2) SJT Cordage - 14/3 AWG 60°C		

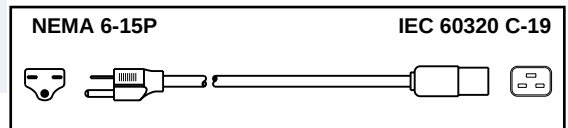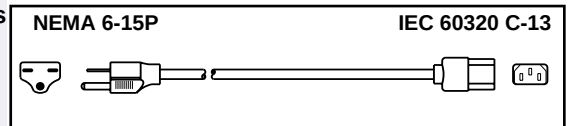

Power Supply Cords

Catalog #	Rating	Description	Conductors	Length	Approvals
81340	10 A 250 V	Straight plug	18/3 AWG	2.5 m	3, 20
81350	13 A 250 V	Straight plug	16/3 AWG	2.5 m	3, 20
81360	15 A 250 V	Straight plug	14/3 AWG	2.5 m	3, 20
		SJTO Cordage - 105°C			

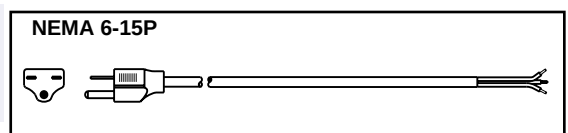

- Black standard color. White and gray available.
- Custom lengths and shielded cords available.
- SJT, 105°C "Hospital Grade" 10 foot long versions available.
- Various terminals, custom stripping, hanked cords available.
- IEC 60320 C-15 120°C type connector available on some models.

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI



International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985
InternationalConfig.com • Sales@InternationalConfig.com

© 2009 International Configurations, Inc. Entire contents of this catalog copyrighted.