

IEC 60320 C-13 & C-14 ACCESSORY POWER CORDS

10 Ampere 250 Volt, 2 Pole 3 Wire Grounding


UL, C-UL, CSA, VDE Approved. (Universal) "CE" Mark



IEC 60320 C-13 IEC 60320 C-14


General Specification Data

Conductor Color Code:	International (Int'l.) Brown (Line), Blue (Neutral), Green/Yellow (Ground)
Plug Standard:	IEC 60320 (320) C-14
Conductor Size / Rating:	18 AWG - 1.0 mm ² @ 10 Ampere 250 Volt
Jacket O.D. (Approx.):	18/3 AWG - 3 x 1.0 mm ² = 8.0 mm
Material:	PVC, Jacket Color Black
Connector Standard:	IEC 60320 (320) C-13
Cordage Standards:	SJTO, H05VVH-3G 105°C
Cord Set Length:	3.1 meters/10', 2.5 meters/8'-2", 2.0 meters/6'-7", 1.0 meters/3'-3"





Power Cord - Detachable Cord Sets

Catalog #	Description	Length	Approvals
98226	C-14 Plug / C-13 connector	2.5 m	3, 20, 22 and (A)
98220	C-14 Plug / C-13 connector	2.0 m	3, 20, 22 and (A)
98216	C-14 Plug / C-13 connector	1.0 m	3, 20, 22 and (A)
98230	C-14 Plug / C-13 connector	3.1 m	3, 20, 22 and (A)
98230x5M	C-14 Plug / C-13 connector	5.0 m	3, 20, 22 and (A)
98226-Y	C-14 Plug / C-13 connectors "Y" Splitter cord	2.5 m	3, 20, 22 and (A)

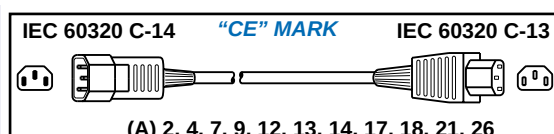


Power Supply Cords

Catalog #	Description	Length	Approvals
98376	C-13 connector	2.5 m	3, 20, 22 and (A)
98380	C-13 connector	2.0 m	3, 20, 22 and (A)
98385	C-13 connector	1.0 m	3, 20, 22 and (A)
98390	C-13 connector	3.1 m	3, 20, 22 and (A)
98276	C-14 plug	2.5 m	3, 20, 22 and (A)
98280	C-14 plug	2.0 m	3, 20, 22 and (A)
98285	C-14 plug	1.0 m	3, 20, 22 and (A)
98290	C-14 plug	3.1 m	3, 20, 22 and (A)

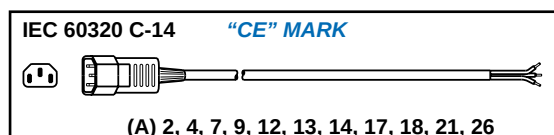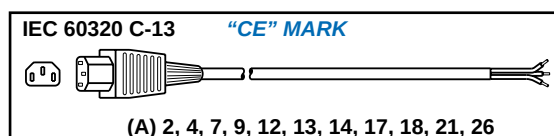

"Y" Type Splitter Cord Set

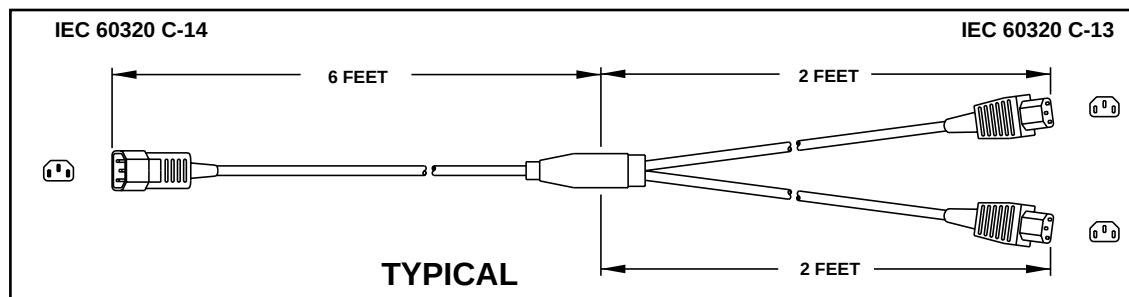

98226-Y / 98625-Y (Page 33)

- Black standard color.
- Minimum order may apply on some models.
- Left or right angle IEC 60320 C-13 connector, C-14 plug available. Minimum order applies.

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI

