

INTERNATIONAL IEC 60320 C-19 ADAPTERS


2 Pole 3 Wire Grounding




IEC 60320 C-20

For Computers and Electronic Equipment - Converts European and
NEMA Plugs to IEC 60320 C-19 Outlets

Connector Style "A" (Straight)

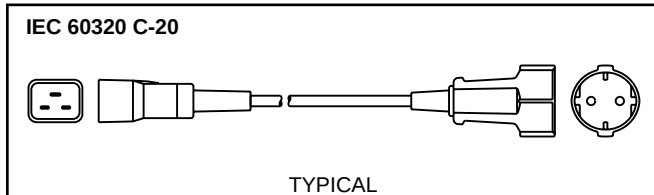

Connector Style "B" (Angled)

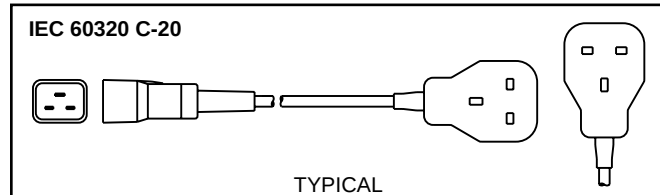

General Specification Data

Rating: 15 Ampere 125 Volt, 15 Ampere 250 Volt, 10 Ampere 250 Volt, 20 Ampere 125 Volt, 20 Ampere 250 Volt
Cord Specifications: SJT, 14/3 AWG, 12/3 AWG
Cord Set Length: 12"
Material: PVC, Jacket Color Black
Conductor Color Code: Black, White, Green

PLUG CONFIG.	PLUG ID.	PLUG STANDARD	CONNECTOR CONFIG.	CONN. ID.	CONNECTOR STANDARD	CONN. STYLE	CATALOG NUMBER
	C-20	IEC 60320		EU1-16R	CEE 7	"A"	31600 ⁽¹⁾⁽⁴⁾
	C-20	IEC 60320		FR1-16R	CEE 7 Variation	"A"	31605 ⁽⁴⁾
	C-20	IEC 60320		UK1-13R	BS 1363A	"B"	31610 ⁽⁴⁾
	C-20	IEC 60320		UK2-15R	BS 546A	"B"	31620 ⁽⁴⁾
	C-20	IEC 60320		AU2-15R	AS / NZS 3112	"A"	31630 ⁽⁴⁾
	C-20	IEC 60320		SW1-10R	SEV 1011	"A"	31640 ⁽⁴⁾
	C-20	IEC 60320		IT2-16R	CEI 23-16	"A"	31650 ⁽¹⁾⁽⁴⁾
	C-20	IEC 60320		DE1-13R	AST 107	"A"	31660 ⁽⁴⁾
	C-20	IEC 60320		IS1-16R	SI 32	"B"	31670 ⁽⁴⁾
	C-20	IEC 60320		AR1-10R	AS/NZS 3112	"A"	31635 ⁽²⁾⁽⁴⁾
	C-20	IEC 60320		CH1-10R	AS/NZS 3112	"A"	31630 ⁽⁴⁾
	C-20	IEC 60320		NEMA 5-15R	UL 498	"A"	31680 ⁽³⁾⁽⁴⁾
	C-20	IEC 60320		NEMA 6-15R	UL 498	"A"	31690 ⁽⁴⁾
	C-20	IEC 60320		NEMA L5-15R	UL 498	"A"	31685 ⁽³⁾⁽⁴⁾
	C-20	IEC 60320		NEMA L6-15R	UL 498	"A"	31695 ⁽⁴⁾
	C-20	IEC 60320		NEMA 5-20R	UL 498	"A"	31700 ⁽³⁾⁽⁵⁾
	C-20	IEC 60320		NEMA 6-20R	UL 498	"A"	31705 ⁽⁵⁾
	C-20	IEC 60320		NEMA L5-20R	UL 498	"A"	31710 ⁽³⁾⁽⁵⁾
	C-20	IEC 60320		NEMA L6-20R	UL 498	"A"	31715 ⁽⁵⁾

- (1) Non-polarized configuration
- (2) Argentine connector has the same configuration as the Australian/Chinese type of socket, except the line and neutral conductors are reversed.
- (3) Use **only** with equipment designed for switching from 250 volts to 125 volts
- (4) 14/3 AWG SJT
- (5) 12/3 AWG SJT

