

IEC 60309 CORD SETS & POWER CORDS

20 Ampere 125 Volt, 2 Pole 3 Wire Grounding IEC 60309 4H-P  20 A / 125 V

20 Ampere 250 Volt, 2 Pole 3 Wire Grounding IEC 60309 6H-P  20 A / 250 V

General Specification Data

Conductor Color Code: North American (N.A.) Black (Line), White (Neutral), Green (Ground)
International (Int'l.) Brown (Line), Blue (Neutral), Green/Yellow (Ground)

Plug Standards: UL 498, CSA, IEC 60309

Conductor Size / Rating: 14 AWG @ 15 Ampere, 12 AWG @ 20 Ampere
1.0 mm² @ 10 Ampere, 1.5 mm² @ 16 Ampere


Jacket O.D. (Approx.): 14 AWG = .370", 12 AWG = .445", 1.0 mm² = 7.2 mm, 1.5 mm² = 8.3 mm

Material: PVC, Jacket Color Black, Temperature 105°C, H05VV-F3G 60°C

Connector Standards: IEC 60320 (320) C-13, C-19


Cordage Standards: SJT, H05VV-F3G

Cord Set Length: 2.5 meters/8'-2"




Power Cord - Detachable Cord Sets

Catalog #	Rating	Plug / Conn.	Cond's.	Length	Component Approvals
39020 ⁽¹⁾	15 A 125 V	4H-P / C-13	14/3 AWG	2.5 m/8'-2"	3, 20

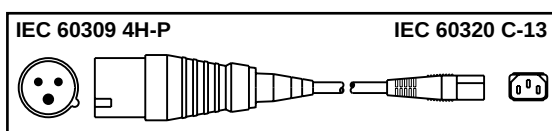


39050 ⁽¹⁾	20 A 125 V	4H-P / C-19	12/3 AWG	2.5 m/8'-2"	3, 20
----------------------	------------	-------------	----------	-------------	-------

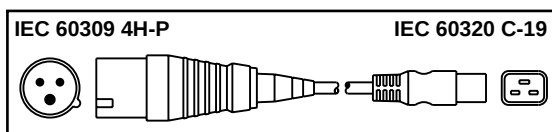


39030 ⁽¹⁾	15 A 250 V	6H-P / C-13	14/3 AWG	2.5 m/8'-2"	3, 20
39035 ⁽¹⁾	10 A 230 V	6H-P / C-13	1.0 mm ²	2.5 m/8'-2"	22

"CE" Mark on #39035. Recommended for European applications.

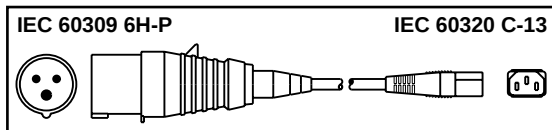

39070 ⁽¹⁾	20 A 250 V	6H-P / C-19	12/3 AWG	2.5 m/8'-2"	3, 20
39016 ⁽¹⁾	16 A 230 V	6H-P / C-19	1.5 mm ²	2.5 m/8'-2"	22, 3, 20


"CE" Mark on #39016. Recommended for European applications.

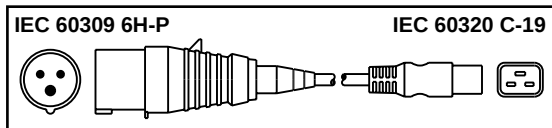


NOTE: #39016 supplied with "universal" approved SJT 105°C (1.5 mm) cordage

Power Supply Cords

Catalog #	Rating	Plug Type	Cond's.	Length	Component Approvals
39021 ⁽¹⁾	15 A 125 V	4H-P	14/3 AWG	2.5 m/8'-2"	3, 20
39041 ⁽¹⁾	20 A 125 V	4H-P	12/3 AWG	2.5 m/8'-2"	3, 20

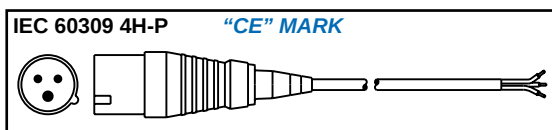

39031 ⁽¹⁾	15 A 250 V	6H-P	14/3 AWG	2.5 m/8'-2"	3, 20, 22
39071 ⁽¹⁾	20 A 250 V	6H-P	12/3 AWG	2.5 m/8'-2"	3, 20, 22
39017 ⁽¹⁾	16 A 230 V	6H-P	1.5 mm ²	2.5 m/8'-2"	22, 3, 20

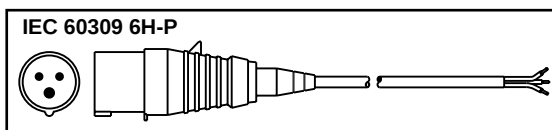

"CE" Mark on #39017. Recommended for European applications.

NOTE: #39017 supplied with "universal" approved SJT 105°C (1.5 mm) cordage

- (1) Cord has assembled on plug and / or connector
- Various terminals and custom stripping are available.
 - Custom lengths are available.
 - IEC 60320 C-15 120°C type connector available on some models.

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI

