

IEC 60309 POWER CORDS

30 Ampere 125 Volt, 2 Pole 3 Wire Grounding IEC 60309 4H-P



30 A / 125 V

30 Ampere 250 Volt, 2 Pole 3 Wire Grounding IEC 60309 6H-P



30 A / 250 V

General Specification Data

Conductor Color Code: North American (N.A.) Black (Line), White (Neutral), Green (Ground)
International (Int'l.) Brown (Line), Blue (Neutral), Green/Yellow (Ground)

Plug Standards: UL 498, CSA, IEC 60309

Conductor Size / Rating: 10 AWG @ 30 Ampere, 4.0 mm² @ 32 Ampere

Jacket O.D. (Approx.): 10 AWG = .670", 4.0 mm² = 5.45 mm


Material: PVC, Jacket Color Black, Temperature 90°C, H07RN-F3G Cordage 60°C

Cordage Standards: SOOW, H07RN-F


Cord Set Length: 2.5 meters/8'-2"

Power Supply Cords

Catalog #	Rating	Plug Type	Cond's.	Length	Component Approvals
39080 ⁽¹⁾	30 A 125 V	4H-P	10/3 AWG	2.5 m/8'-2"	3, 20

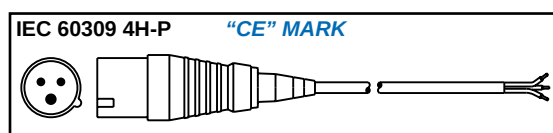

39090 ⁽¹⁾	30 A 250 V	6H-P	10/3 AWG	2.5 m/8'-2"	3, 20, 22
39095 ⁽¹⁾	32 A 230 V	6H-P	4.0 mm ²	2.5 m/8'-2"	22

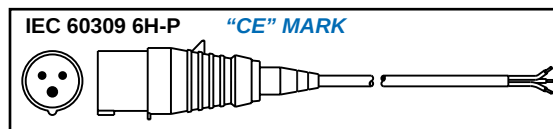

NOTE: #39095 supplied with H07RN-F3G, 60°C cordage.
"CE" Mark on #39095. Recommended for European applications.
NOTE: Available with "universal" approved UL, CSA, VDE 90°C
SOOW-H07RN-F 10 AWG (6.0 mm) cordage #39095-A

(1) Cord has assembled on plug

- Various terminals and custom stripping are available.
- Custom lengths are available.

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO
14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI



International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985
InternationalConfig.com • Sales@InternationalConfig.com

© 2009 International Configurations, Inc. Entire contents of this catalog copyrighted.