CAT. No.

EUROPEAN "SCHUKO" CEE 7-7 STRAIGHT PLUG, GREY, 2 POLE 3 WIRE, 16 AMPERE 250 VOLT, (EU1-16P)

70142

STANDARD:CEE7-7

APPROVALS / CERT'S.

FI [] KEMA [] NEMKO [] OVE [] SEMKO [] VDE []


ALL DIMENSIONS ARE IN MILLIMETERS


NOTE:

- 1. "SCHUKO" PLUGS AND RECEPTACLES ARE NON-POLARIZED.
- 2. EQUIPMENT GROUND TERMINAL IS IDENTIFIED WITH SAMBOL.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

7				
CORDAGE PREPARATION				
CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"	
GREEN / YELLOW	GROUND	22	7	
BLUE	NEUTRAL	30	10	
BROWN	LINE	30	10	



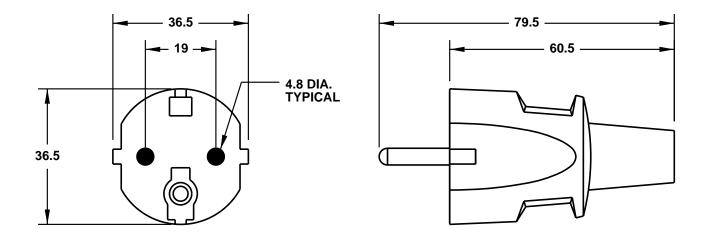

International Configurations, Inc. P.O. Box 3374 Enfield, Connecticut 06083 TEL (860) 749-6380 FAX (860) 749-2985