

UNITED KINGDOM (BS 1363A) CORD SETS & POWER CORDS

13 Ampere 250 Volt, 2 Pole 3 Wire Grounding UK1-13P



13 A / 250 V


2.5 Ampere 250 Volt, 2 Pole 2 Wire.....



2.5 A / 250 V

General Specification Data


Conductor Color Code: Brown, Blue, Green/Yellow (3 wire); Brown, Blue (2 wire)
Plug Standards: BS 1363A, Fused 13 Ampere, 10 Ampere, 5 Ampere, 3 Ampere
Conductor Size / Rating: 0.75 mm² @6 Ampere, 1.0 mm² @ 10 Ampere, 1.5 mm² @ 16 Ampere
Jacket O.D. (Approx.): 6.4 mm = 3 x 0.75 mm², 7.2 mm = 3 x 1.0 mm², 8.3 mm = 3 x 1.5 mm²
Material: PVC, Jacket Color Black, Temperature 70°C.
Connector Standards: IEC 60320 (320) C-13, C-19, C-5, C-7, C-15
Cordage Standards: H05VV-F3G, H03VV-F3, H03VV-H2, H05VV-H2, H05VV-F2, CENELEC HD-21 (HAR)
Cord Set Length: 2.5 meters/8'-2", 1.8 meters/6'



Power Cord - Detachable Cord Sets


Catalog #	Rating	Description	Length	Approvals
83221	10 A 250 V	Straight C-13 connector	2.5 m	26 and (A)
83221-LA	10 A 250 V	Left angle C-13 connector	2.5 m	26 and (A)
83221-RA	10 A 250 V	Right angle C-13 connector	2.5 m	26 and (A)

Cordage - H05VV-F3G 1.0 mm². Plug contains BS 1362 13 ampere fuse. Available with 3, 5, 10 ampere fuse.

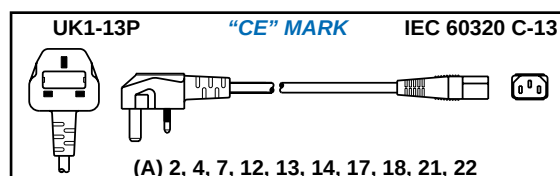


80201	13 A 250 V	Straight C-19 connector	2.5 m	26 and (A)
80201-LA	13 A 250 V	Left angle C-19 connector	2.5 m	26 and (A)
80201-RA	13 A 250 V	Right angle C-19 connector	2.5 m	26 and (A)

Cordage - H05VV-F3G 1.5 mm². Plug contains BS 1362 13 ampere fuse. Available with 3, 5, 10 ampere fuse.

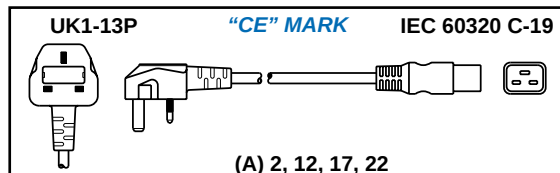


83950	2.5 A 250 V	Straight C-5 connector	1.8 m	26 and (A)
-------	-------------	------------------------	-------	------------

Cordage - H03VV-F3 0.75 mm². Plug contains BS 1362 3 ampere fuse.

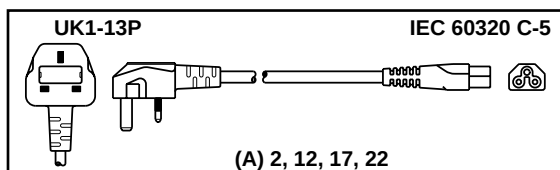

83900	2.5 A 250 V	Straight C-7 connector	1.8 m	26 and (A)
-------	-------------	------------------------	-------	------------


Cordage - H03VV-H2 0.75 mm². Plug contains BS 1362 3 ampere fuse.

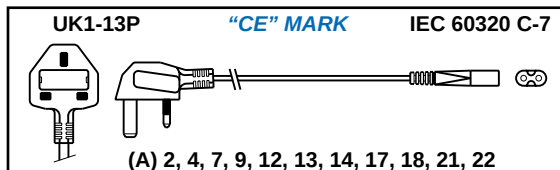

Power Supply Cords

Catalog #	Rating	Description	Conductors	Length	Approvals
83040 ⁽¹⁾	6 A 250 V	Angle plug	0.75 mm ²	2.5 m	26
83070 ⁽²⁾	10 A 250 V	Angle plug	1.0 mm ²	2.5 m	26
83100 ⁽³⁾	13 A 250 V	Angle plug	1.5 mm ²	2.5 m	26

Cordage - H05VV-F3G
 Plug contains BS 1362 fuse: (1) 5 ampere (2) 10 ampere (3) 13 ampere

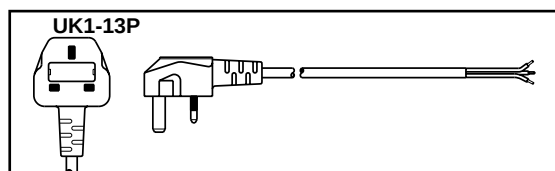

- Black standard color. White and gray available.
- Various terminals, custom stripping, hanked cords available.
- Custom lengths and shielded cords available.
- IEC 60320 C-15 120°C type connector available on some models.

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI

