

NORTH AMERICAN CORD SETS & POWER CORDS

20 Ampere 125 Volt, 2 Pole 3 Wire Grounding NEMA 5-20P



20 A / 125 V


20 Ampere 250 Volt, 2 Pole 3 Wire Grounding NEMA 6-20P



20 A / 250 V


General Specification Data

Conductor Color Code: North American (N.A.) Black (Line), White (Neutral), Green (Ground)
International (Int'l.) Brown (Line), Blue (Neutral), Green/Yellow (Ground)
Plug Standards: UL 498, CSA, NEMA, ANSI
Conductor Size / Rating: 12 AWG @ 20 Ampere
Jacket O.D. (Approx.): 12 AWG = .445"
Material: PVC, Jacket Color Black, Temperature 105°C
Connector Standards: IEC 60320 (320) C-19
Cordage Standards: SJTO
Cord Set Length: 2.5 meters/8'-2"




Power Cord - Detachable Cord Sets

Catalog #	Rating	Description	Length	Approvals
80551	20 A 125 V	Straight C-19 connector	2.5 m	3, 20
80551-LA	20 A 125 V	Left angle C-19 connector	2.5 m	3, 20
80551-RA	20 A 125 V	Right angle C-19 connector	2.5 m	3, 20

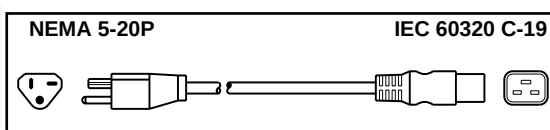


Power Supply Cord

Catalog #	Rating	Description	Length	Approvals
80560	20 A 125 V	Straight plug	2.5 m	3, 20

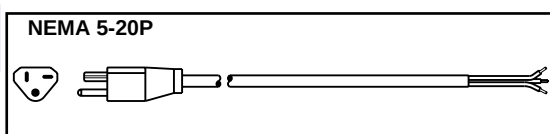


Power Cord - Detachable Cord Sets

Catalog #	Rating	Description	Length	Approvals
80601	20 A 250 V	Straight C-19 connector	2.5 m	3, 20
80601-LA	20 A 250 V	Left angle C-19 connector	2.5 m	3, 20
80601-RA	20 A 250 V	Right angle C-19 connector	2.5 m	3, 20

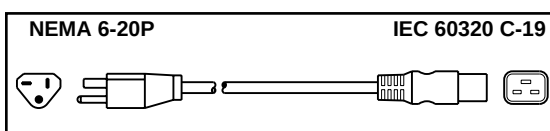


Catalog #	Rating	Description	Length	Approvals
80615	15 A 250 V	Straight C-13 connector	2.5 m	3, 20

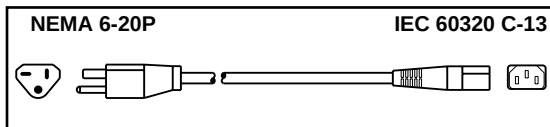

Power Supply Cord

Catalog #	Rating	Description	Length	Approvals
80660	20 A 250 V	Straight plug	2.5 m	3, 20

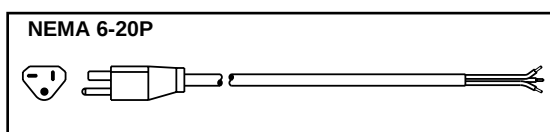

- Black standard color.
- Custom lengths and shielded cords available.
- Various terminals, custom stripping, hanked cords available.

Approvals: 1.ASTA 2.CEBC 3.CSA 4.DEMKO 5.PSE 6.DFT 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO
 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL, C-UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI

